



## FC2002


### 2 HP DIRECT DRIVE

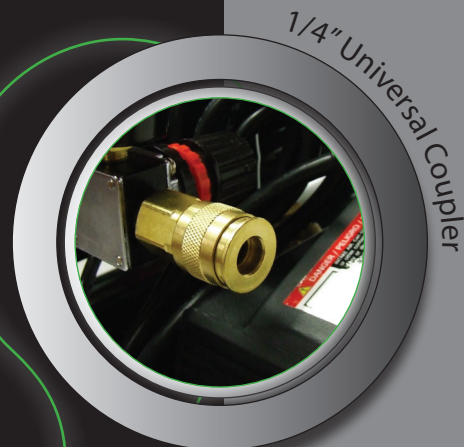

1/4" Universal Coupler

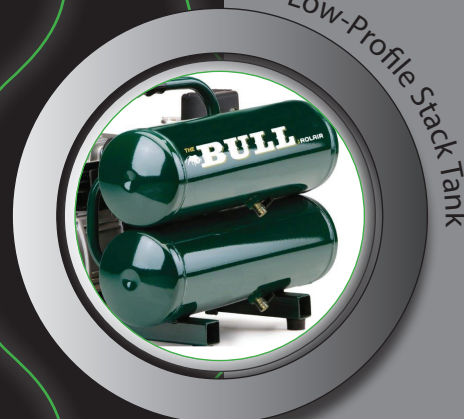

Low-Profile Stack Tank

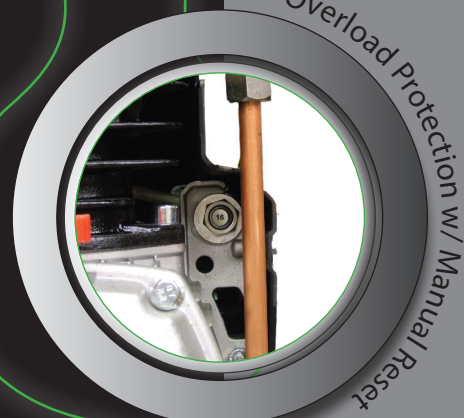

Overload Protection w/ Manual Reset

SPECIFICATIONS

HORSEPOWER	2.0 HP
MOTOR RPM	3400
CFM DELIVERED @ 40 PSI	5.4 CFM
CFM DELIVERED @ 90 PSI	4.1 CFM
CFM DISPLACED	8.7 CFM
TANK CAPACITY	4.3 GALLONS
FACTORY SETTINGS	95-125 PSI
PUMP-UP / RECOVERY TIME	1:10 / :15
SHIPPING WEIGHT	62 LB
DIMENSIONS (LxWxH)	20"x15"x17"
NOISE LEVEL	80 dBA
THERMAL PROTECTION	MANUAL
AMP DRAW (RUNNING)	14.6

EQUIPMENT

FEATURES

- START/STOP PRESSURE SWITCH
- AIR LINE REGULATOR AND PRESSURE GAUGE
- LOW-PROFILE STACK TANK
- TANK PRESSURE GAUGE
- SAFETY RELIEF VALVE
- INTAKE FILTER